




Features

- 6.4 mm (1/2.8 Type Progressive Scan) CMOS
- Max 60 fps @ 1920 x 1080
- Color 0.03 lux / BW 0.003 lux @F1.2, 50IRE
- 120dB of Wide Dynamic Range
- H.264 (High Profile Supported) / MJPEG
- Defog, Audio/Face/Tampering Detection
- Video Analytic ready, ABF (Auto Back Focus)
- Alarm In/Out, Audio In/Out, Micro SD Slot

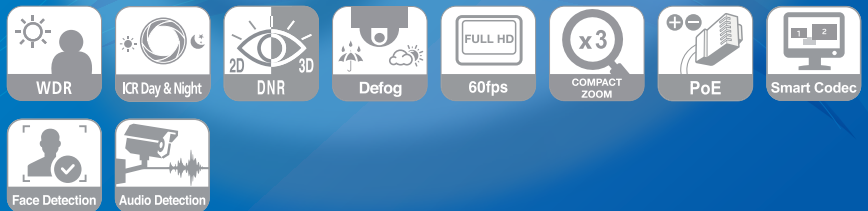


LNB7210

2 Megapixel 60 fps full HD Network Box Camera

Specifications

Model: LNB7210						
Camera	Image Sensor	6.4 mm (1/2.8 Type) CMOS	Interface	Video In / Out	1 RCA Out	
	Lens Type	CS mountable		Audio In / Out	1 In / 1 Out	
	Max. Resolution	1920 x 1080		Alarm In / Out	1 In / 1 Out	
	Min. Illumination	Color : 0.03 lux @F1.2 (1/30 sec, 50 IRE) B/W : 0.003lux @F1.2 (1/30 sec, 50 IRE)		SD Slot	Micro SD (Up to 32 GB)	
	Day / Night	ICR (Auto / Day / Night / External / Schedule)		Network	Ethernet	RJ-45 10/100BASE-T
	WDR	Max. 120 dB			Security	Password protection, HTTPS (SSL, TLS), IP filtering, IEEE 802.1X
	Focus	ABF			Open Protocol	ONVIF 2.2 Profile S, PSIA 1.1
	Image Enhancement	Backlight compensation / 2D+3D DNR / Defog / Exposure control / AGC / White balance / Privacy masking / Sharpness / EIS / Pivot			Protocol	IPv4/6 - TCP, UDP, HTTP, HTTPS, RTP, RTSP, DHCP, ICMP, QoS IPv4 - FTP, SMTP, NTP, ARP, SNMPv1/v2c/v3, DDNS(LG)
Video Analytics	Motion detection, Tampering alarm, Face detection, Intrusion, Crossing line, Object counting, Object removal, Object desertion	Web Viewer	Microsoft Internet Explorer 7.0 ~ 9.0 (32bit)			
Video / Audio	Video Compression	H.264 (High profile supported) / MJPEG	Video Management Software		LG Ipsolute VMS Suite, Mobile App (iPhone, iPad, Android)	
	Max. Frame Rate	60 fps @ 1920 x 1080	Connections		Up to 20	
	Multi-Streaming	Yes (Up to 4)	General		Power Source	PoE / DC12V
	ROI (Region of Interest)	Smart Codec (Up to 2 per each stream)		Max. Power Consumption	6.9 W	
	Streaming on Motion	Yes		Operating Temperature	-10°C ~ 55°C	
	Text Overlay	Yes		Operating Humidity	0% ~ 80%RH	
Audio Compression	G.711, G.726	Standard Approvals		UL, FCC, CE, KC, Police (China)		
Two-way Audio	Yes	Color / Material		Black & Silver / Aluminum		
Event	Audio Detection	Yes	Dimension	69 x 54 x 136 mm		
	Event Trigger	Video analytics, Audio detection, Alarm input	Weight	395 g		
	Event Notification	Relay Out, Email, FTP				
	Pre/Post Event Buffering	5 / 5 seconds				

DIMENSION (Unit:mm)

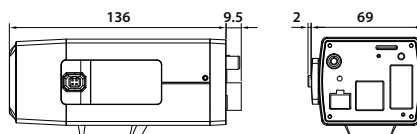

[LNB7210_Side]

[LNB7210_Rear]