




Features

- Water-proof design for outdoor uses
- Ready for wall mount – installation kits provided
- Double-layer design for easier installation and maintenances
- Lower layer for splitters and over length fiber storage
- Upper layer for splicing, cross-connecting and fiber distribution
- Cable fixing units provided for fixing the outdoor optical cable
- Accommodates both cable glands as well as tie-wraps
- Lock provided for extra security

Specifications

Model	FTMB-SLIM-6D Series	
For Number of Couplers	6	
Capacity	LC	6 Capacity / 12 cores (Max.)
	SC	6 Capacity / 6 cores (Max.)
	ST	6 Capacity / 6 cores (Max.)
	FC	6 Capacity / 6 cores (Max.)
Working Temperature	- 40 °C ~ + 85 °C	
Relative Humidity	< 85 % (+ 30 °C)	
Atmospheric Pressure	70 Kpa ~ 106 Kpa	
Insertion Loss	< 0.2 dB	
UPC Return Loss	> 50 dB	
APC Return Loss	> 60 dB	
Life of Insertion and Extraction	> 1000 times	
Size	215 x 140 x 40 mm	

How to Order :

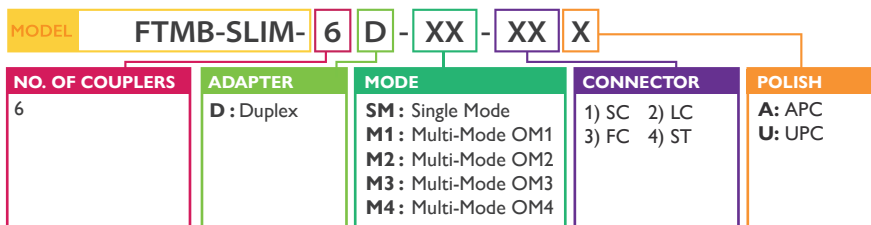

Remember to State :

- 1) Number of Core(s) 2) Type of Coupler 3) Mode of fiber

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.