


Features

- Designed to seal without screws
- The compact size and flip-over cover bring easy operation as well as complete function
- The splice trays are jointed with a hinge at one side, which makes the operation in each tray easier
- It is designed to prevent from operation damage

Specifications

Model		FTMB-IP68-XXD Series
For Number of Couplers		Up to 24
Dimension		380 x 245 x 130 mm
Weight		5 kg
Max Capacity	LC	24 Capacity / 48 cores (Max.)
	SC	24 Capacity / 24 cores (Max.)
	ST	24 Capacity / 24 cores (Max.)
	FC	24 Capacity / 24 cores (Max.)
Splice Tray Quantity		1 ~ 4
IP Grading		IP68
Environmental Temperature		-40 °C ~ 65 °C

How to Order :

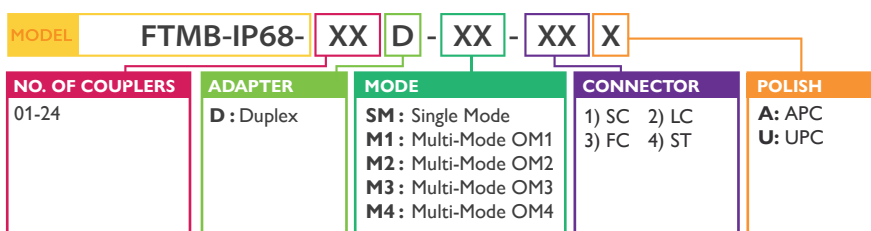

Remember to State :

1) Number of Core(s) 2) Type of Coupler 3) Mode of fiber

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.