




LC8

HD Digital Receiver

- Fully compliant with DMB-TH standard
- Single carrier and Multi carrier Support
- MPEG-2 / H.264HD Support
- USB PVR-Ready Support
- HD Digital Video output by HDMI or YPbPr
- Multiple OSD Language:
English and Traditional Chinese
- Display EPG / Subtitle
- Favorite program setting
- Multimedia Play Support
(AVI, JPEG, MP3 etc)

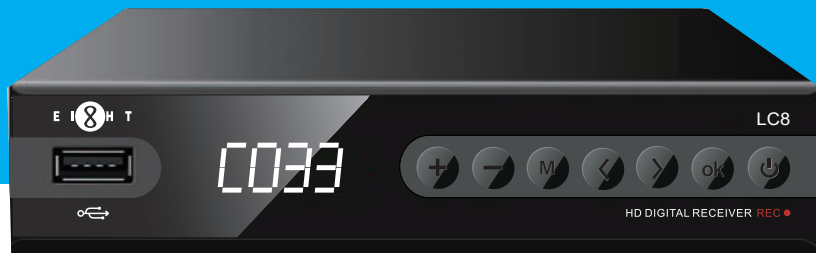

Specification

Tuner		Rear Panel	
RF Input	115-451 MHz (VHF), 474-858 MHz (UHF)	Tuner Input	1
Loop Through Output	115-451 MHz (VHF), 474-858 MHz (UHF)	Tuner Loop Through	1
Signal Decoding		CVBS	1
Standard	DMB-TH (GB20600-2006)	YPbPr	1
Bandwidth	8M	HDMI	1
Video		Stereo Audio	1
Standard	ISO/IEC13818-2, MP@HL/ML H.264 HD/SD	Digital Audio (Coaxial)	1
Display Ratio	1080P/1080i/720P	Power Supply	
Audio Decoding		Input Voltage	110V-240V 50 / 60Hz
Standard	ISO / IEC 11172-3	DC IN	12V / 1A
Audio Format	Support MPEG1, 2 layer I and II, AC3	Working Temperature	0-40°C
Sampling Frequency	32, 44.1, 48KHz	Size	
Front Panel		W x D x H	148mm x 92mm x 35mm
Display	4 Digit LED		
USB	1		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

EIGHT LIMITED

No.18, 4/F., Thriving Industrial Centre, 26-38 Sha Tsui Road, Tsuen Wan, N.T., Hong Kong TEL : (852) 2413 2222 FAX : (852) 2411 3000 EMAIL : info@eightgroup.com