

- Pass through the window frame without drilling
- Low insertion loss

## FJ37F Flexible Cable Jumper






### Specification

#### Reverse loss

<b>10-770 MHz</b>	2.0 dB
<b>770-1336 MHz</b>	3.0 dB
<b>1336-2150 MHz</b>	5.0 dB

**Working temperature** -20 ~ 50°C

#### Installation

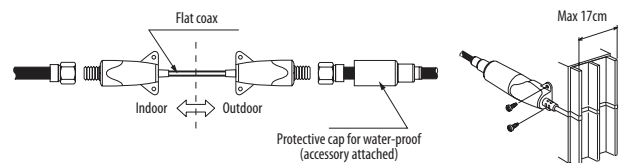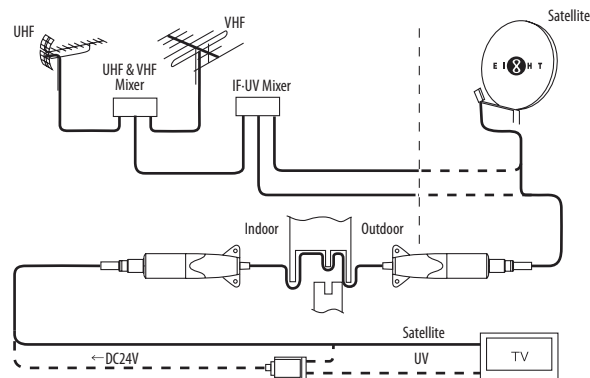

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.